

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 July 2004 (29.07.2004)


PCT

(10) International Publication Number
WO 2004/063452 A1

- (51) International Patent Classification⁷: **D06F 71/29**, 81/08
- (21) International Application Number: PCT/GB2003/005522
- (22) International Filing Date: 17 December 2003 (17.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0300631.9 10 January 2003 (10.01.2003) GB
- (71) Applicant and
(72) Inventor: **DOCKER, George** [GB/GB]; 8 Parthenia Road, London SW6 4BD (GB).
- (74) Agents: **GREY, Ian** et al.; Venner, Shipley LLP, 20 Little Britain, London EC1A 7DH (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: TROUSER PRESS/IRONING BOARD

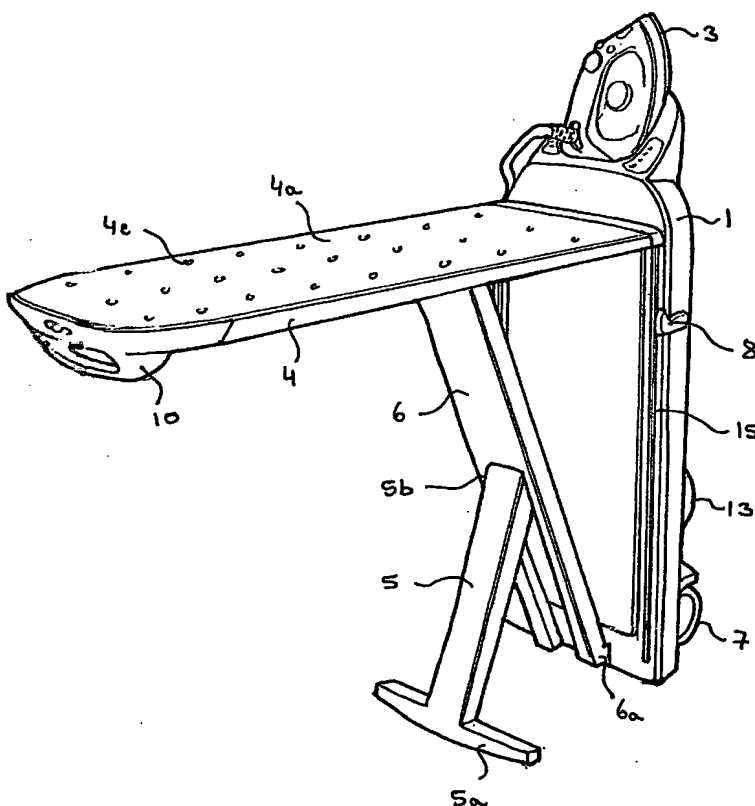

(57) Abstract: A combined trouser press and ironing board assembly is disclosed. It comprises a heatable pad (14) against which a surface of a pressure plate (4) is clampable in a first position to sandwich a garment to be pressed therebetween. The pressure plate (4) is mounted by means which allow said plate (4) to be moved relative to the heatable pad (14) into a second ironing position in which the pressure plate (4) extends laterally outwardly relative to the heatable pad (14) so that the surface thereof which was facing the heatable pad (14) in its first position now provides the surface on which a garment can be placed for ironing.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.